


Advent-Gemini LED PICTURE LIGHT

PLEASE SAVE THESE INSTRUCTIONS.

Bulb and Shade Assembly

FIGURE 1



1. Snap the two Metal Spring Clips over the middle of the rotating socket. (Figure 1)
2. Squeeze ends of Metal Spring Clips together and fit inside narrow end of shade. (Figure 2)
3. Place 4 watt LED MR16 bulb assembly into metal shade and gently fit bulb pins into holes on Rotating Socket. (Figure 2)
4. Align set screws with hole in shade. Secure bulb in Rotating Socket by using small $\frac{3}{64}$ Allen wrench provided. (Figure 2)
5. Adjust rotating tension by **tightening** set screws on top of Rotating Socket with small Allen wrench $\frac{3}{64}$. (Figure 3)

FIGURE 2


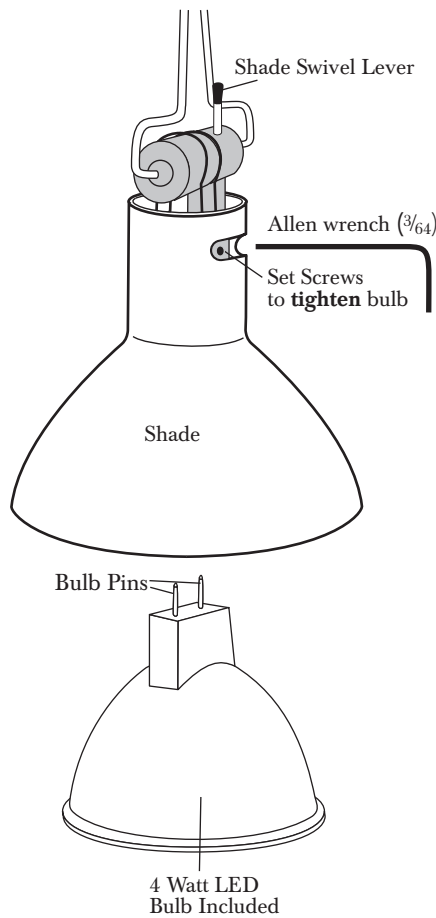


FIGURE 3

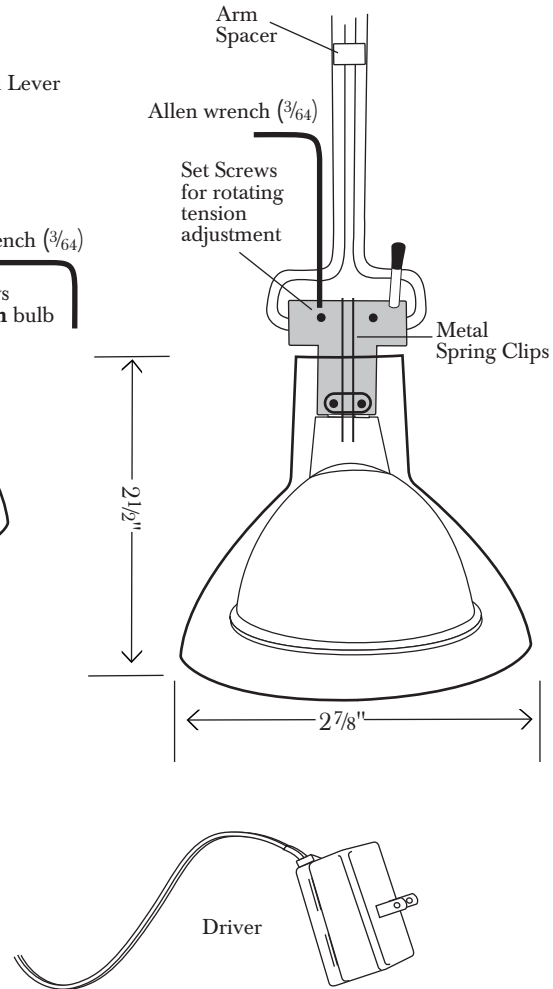

Picture Light Bracket Installation

1. Assemble bulb and shade unit. Select mounting location for picture.
2. Attach the bracket to the wall in the proper location using the hardware included.
3. Adjust the picture light height by loosening the two $\frac{5}{64}$ set screws in the front of the picture light bracket with the $\frac{5}{64}$ Allen wrench (provided). Slide the arms to the desired height, then **tighten** set screws.
4. Hang the picture wire in the picture hanging slot on the picture light bracket. (Figure 2)

Fixture Arms **MUST** be separated for lamp to operate.

FIGURE 2


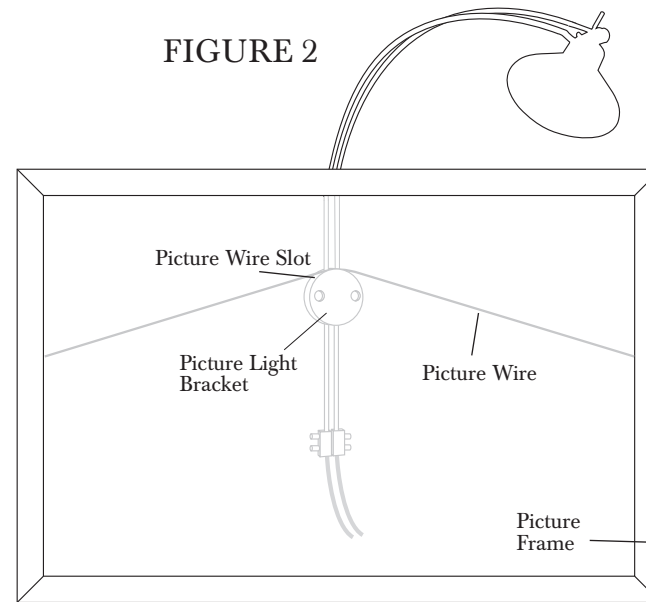


FIGURE 1

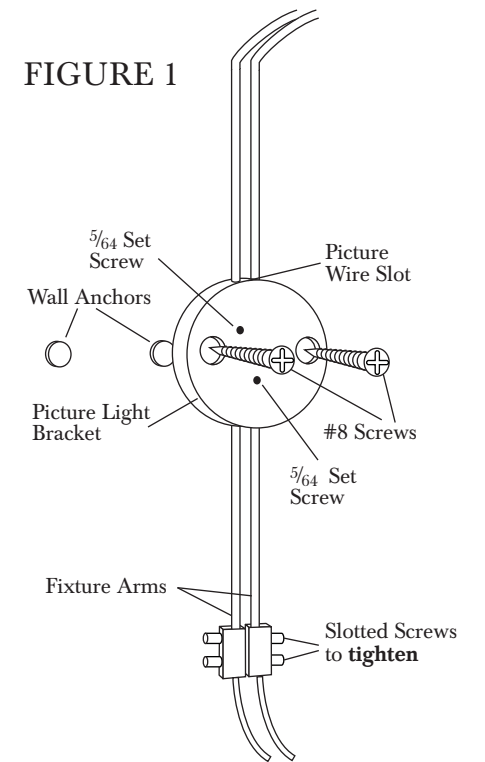

IMPORTANT SAFETY INSTRUCTIONS

WARNING: LAMPS ARE HOT!

TO REDUCE THE RISK OF FIRE, ELECTRICAL SHOCK OR PERSONAL INJURY:

1. Turn off/unplug and allow to cool before replacing bulb.
2. Bulb gets **HOT** quickly! When turning on or off, touch only the plug or switch.
3. **DO NOT TOUCH HOT** Bulb.
4. Do not look directly at lit bulb.
5. Keep lamp away from any materials that may burn.
6. Use only 4 Watt LED MR16 bulb.

IMPORTANT

All connections must be **tightened** to ensure continuity.

House of Troy