


LLED30 MOUNTING INSTRUCTIONS


1. Unscrew the two ball nuts and remove the Retainer from the Backplate.
2. Connect Black & White wires from Light to AC line (120 VAC).
3. Attach Retainer to Junction Box.
4. Re-attach Backplate to Retainer with ball nuts.
5. Adjust the shade to the desired position by loosening wing nuts on swivels and repositioning the arms and shade.
Be sure shade is not too hot before touching it.

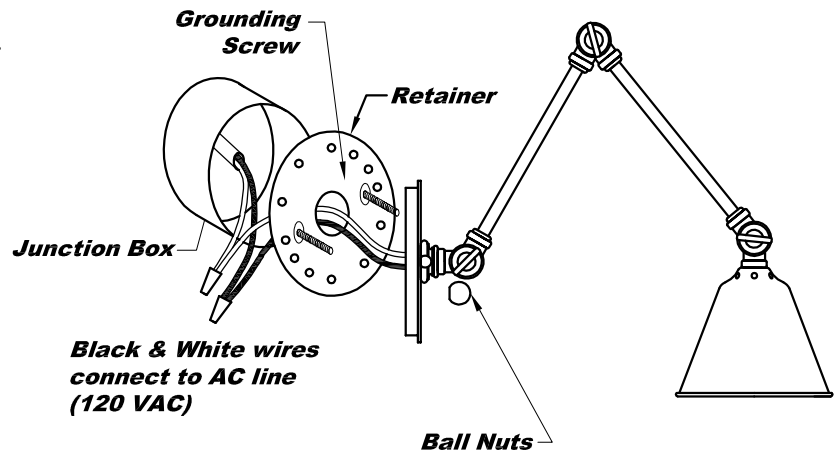

House of Troy - 902 Silver Ridge Rd. - Hyde Park, VT 05655 - 802 888 7984
houseoftroy.com

LLED30 MOUNTING INSTRUCTIONS

1. Unscrew the two ball nuts and remove the Retainer from the Backplate.
2. Connect Black & White wires from Light to AC line (120 VAC).
3. Attach Retainer to Junction Box.
4. Re-attach Backplate to Retainer with ball nuts.
5. Adjust the shade to the desired position by loosening wing nuts on swivels and repositioning the arms and shade.
Be sure shade is not too hot before touching it.

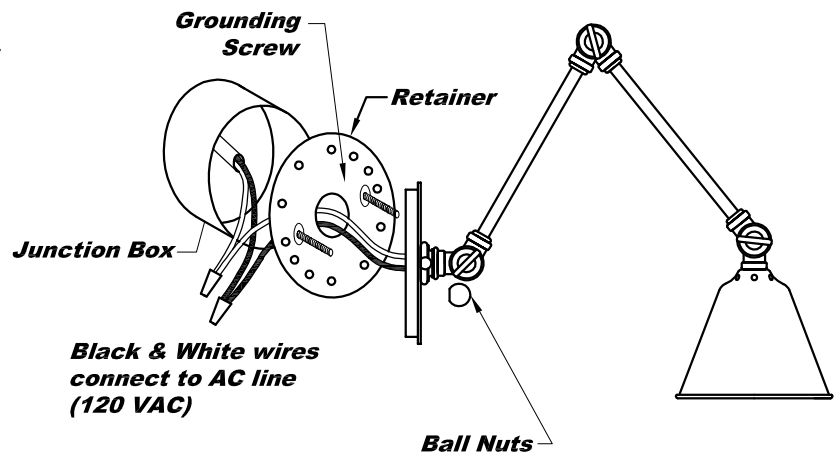

House of Troy - 902 Silver Ridge Rd. - Hyde Park, VT 05655 - 802 888 7984
houseoftroy.com